ICBA, CE 220-240V EURO

Height: 26.8" Width: 10.2" Depth: 22.1" (68.1cm) (25.9cm) (56.1cm)





- Sleek modernized design language, with rounded angles on the corners and trunk
- Digital readout displays in English, Spanish, or French ---for easier programming and control--- and can show either 'Standard' or Metric measurements. Digital readout also shows machine status, and targeted advertising messages can be programmed for display.
- BUNN Infusion Series technology allows for multiple recipes from one footprint --with three brew buttons and two batch sizes
- Energy-saver mode reduces tank temperature during idle periods
- The exclusive Peak Extraction® Sprayhead provides improved uniformity of extraction and greater resistance to limescale buildup
- Electronic funnel lock prevents removal of each brew funnel until drip- through is complete
- USB programming capable
- Brew counter keeps track of how many batches are brewed
- Pre-infusion and pulse brew for maximum flavor extraction. Cold brew lockout & digital temperature control further ensure top-notch brewing.
- Hot water faucet (supplied for custom installation)
- · Servers not included unless otherwise noted

Agency:



Specifications

Product #: 53100.0502 Funnel: Black Plastic Smart Funnel

Water Access: Plumbed Interface: Wireless
Finish: Stainless

Electrical & Capacity

Volts*	Amps	Watts	Cord Attached	Plug Type	8oz cups/hr 236ml cups/hr	Input H ² O Temp.	Phase	# Wires plus Ground	Hertz
220-240	11.0-12.0	2400-2900	Yes	EURO 16A	141	60°F (15.5°C)	1	2	50-60

"When a BUNN is machine rated 120/208-240V, 120/208V or 120/240V, the higher voltage is the supply voltage needed to power the machine. The 120V is there to supply power to some components rated 120V in the machine, but it is not the supply voltage and would not power the machine if the machine is marked with the before mentioned ratings.

Plumbing Requirements

PSI	kPa	Fitting Supplied	Water Flow Required (GPM)				
20-90	138-621	3/8" Male Flare Fitting	1.00				


CAD Drawings

Additional Features

2D	Revit	KLC
•		

MARNING:



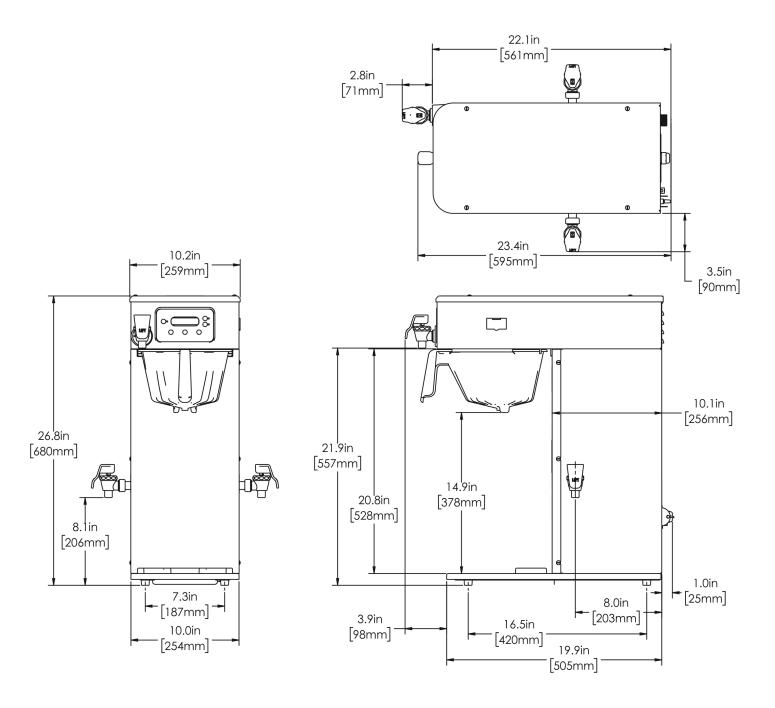

Unit				Shipping				
	Height	Width	Depth	Height	Width	Depth	Weight	Volume
English	26.8 in.	10.2 in.	22.1 in.	34.9 in.	13.3 in.	27.4 in.	46.860 lbs	7.321 ft³
Metric	68.1 cm	25.9 cm	56.1 cm	88.6 cm	33.7 cm	69.5 cm	21.256 kgs	0.207 m³



Related Products & Accessories: ICBA, CE 220-240V EURO(53100.0502)



FILTERS, GOURMET 500 500/1 50/CL

Product #: 20138.1000



WATER FILTER, EQHP-10L

Product #: 39000.00013



WATER FILTER, EQHP-10

Product #: 39000.00043



FUNNEL ASSY, SMART COFFEE BLK-CLEARED

Product #: 53463.0021



FUNNEL ASSY, SMART COFFEE BLK-CLEARED

Product #: 53463.0038²



SYSTEM, WQ-55(2)5L

Product #: 56000.00011



SYSTEM, WQ-55(2)5

Product #: 56000.00041



SYSTEM, WEQ-10(1.5)5L

Product #: 56000.00241



SYSTEM, WEQ-10(1.5)5

Product #: 56000.00271



CARTRIDGE, WQ-55(2)5L

Product #: 56000.01011



CARTRIDGE, WQ-55(2)5

Product #: 56000.01041



CARTRIDGE, WEQ-10 (1.5)5L

Product #: 56000.01211



CARTRIDGE, WEQ-10 (1.5)5

Product #: 56000.01221

1NSF Certified 2NSF Certified with spec sheet model listed 3NSF Certified under Solventum Purification 4NSF Certified under Mavea LLC 5NSF Certified under Zojirushi 6NSF Certified under Qins Inc 7NSF COMPONENT Certified



Serving & Holding Options: ICBA, CE 220-240V EURO(53100.0502)



AIRPOT, 2.5L SST LA SINGLE PK

Product #: 32125.0000⁶ Mfr#:SVAP-2500F-N



AIRPOT, 2.5L SST LA 6/ CASE

Product #: 32125.0100⁶ Mfr#:SVAP-2500F-N



AIRPOT, 3.0L SST LA SINGLE PK

Product #: 32130.0000⁶ Mfr#:SVAP-3000F-N



AIRPOT, 3.0L SST LA 6/ CASE

Product #: 32130.0100⁶ Mfr#:SVAP-3000F-N



AIRPOT, 3.8L SST LA SINGLE PK

Product #: 36725.0000⁶

Mfr#:SVAP-3800F-N



AIRPOT, 3.8L SST LA 6/ CASE

Product #: 36725.0100⁶ Mfr#:SVAP-3800F-N



STAND ASSY, TF SERVER

Product #: 39795.0003



TF SERVER, DSG2 1G SST NOBASE

Product #: 42700.00501



TF SERVER, DSG2 1G BLK NOBASE

Product #: 42700.00511



TF SERVER, 1G DSG GEN3 NOBASE

Product #: 42700.02501



TF SERVER,DSG2 1.5G SST NOBAS

Product #: 42750.00501



TF SERVER, 1G/3.8L MECH NOBASE

Product #: 44000.00501



TF SERVER, 1G/3.8L MECH BLK NOBASE

Product #: 44000.00511



TF SERVER, 1G MECH GEN3 NOBASE

Product #: 44000.02501



TF SERVER, 1.5G/5.7L MECH NOBASE

Product #: 44050.00501

1NSF Certified 2NSF Certified with spec sheet model listed 3NSF Certified under Solventum Purification 4NSF Certified under Mavea LLC 5NSF Certified under Zojirushi 6NSF Certified under Qins Inc 7NSF COMPONENT Certified



Serving & Holding Options: ICBA, CE 220-240V EURO(53100.0502)



TF SERVER, 1.5G/5.7L MECH BLK NOBASE

Product #: 44050.00511

STAND ASSY, TF SERVER

Product #: 54473.0000



STAND ASSY KIT, TF SERVER

Product #: 54473.1000

