



# HOSHIZAKI

## > IM-220AA

Daily ice production capacity up to 220 KG



The Hoshizaki cube is characterized by its clean edges and its transparency streaked by a marbling effect. When the CELL WALLS block the freezing water's expansion from all sides, while reaching up to -30°C during the cubing process. As the temperatures go down, the water keeps expanding and marbles start to form as a sign of extreme density and compactness of every single cube.



> Picture with Ice bin B-301SA


CUBE ICE MAKER SERIES

I-FIT SERIES


### FEATURES

- > Zero clearance rear design for easy installation
- > Round front door and easy access to ice
- > Pull out air filter design for easy cleaning
- > Front water valve access for easy servcability
- > Stainless steel exterior provides hygienic and high qualified finish

### ICE SIZE

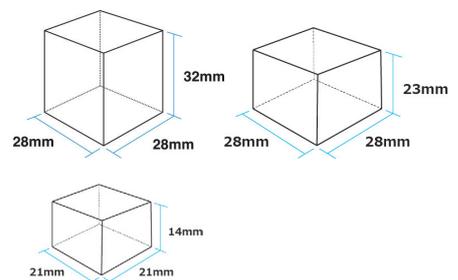

### MARBLE EFFECT

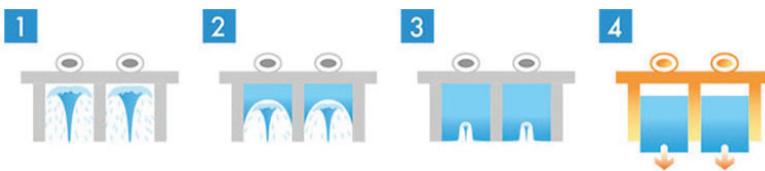


- > Individual cube
- > Impurity free
- > Hardest ice to enjoy slow melting and dilution of drinks

### CERTIFICATION




# DIMENSIONS & SPECIFICATION


## TOP SIDE

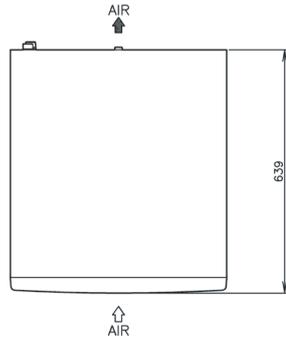


## FRONT SIDE

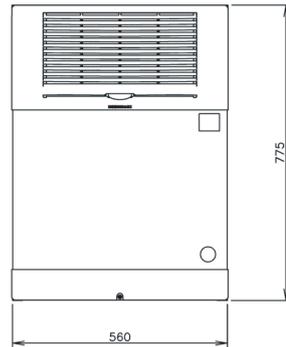

## RIGHT SIDE

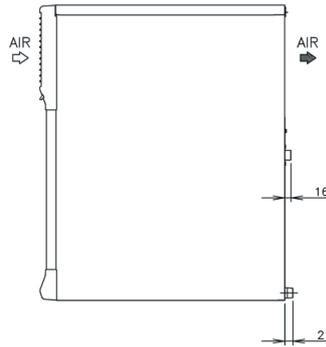

## BACK SIDE

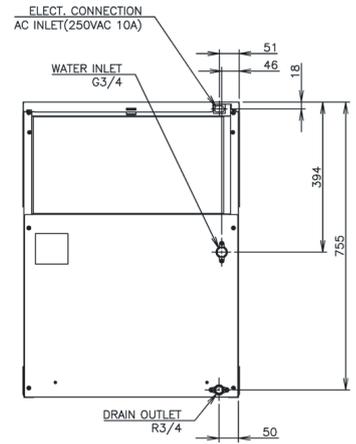

<b>IM-220AA</b>		
<b>ICE DIMENSIONS (WxDxH)</b>	28 x 28 x 32mm (Standard size) 28 x 28 x 23mm (23 mm size) 21 x 21 x 14mm (21 mm size)	
<b>DIMENSIONS (WxDxH)</b>	560 x 639 x 775 mm	
<b>PACKAGE DIMENSIONS (WxDxH)</b>	644 x 728 x 878 mm	
<b>WEIGHT (NET/GROSS)</b>	69 KG / 76 KG	
<b>AMPERAGE / STARTING AMPERAGE</b>	5.3 A / 38 A	
<b>ELECTRICAL CONSUMPTION (AT32°C/WT21°C)</b>	950 W	
<b>REFRIGERANT CHARGE</b>	R404A / 500g	
<b>HEAT REJECTION (AT32°C/WT21°C)</b>	2250 W 1936 kcal/h	
<b>ICE PRODUCTION PER 24H (15MM)</b>	(AT10°C/WT10°C)	220 KG
	(AT21°C/WT15°C)	200 KG
	(AT32°C/WT21°C)	175 KG
<b>ICE PRODUCTION PER CYCLE (AT32°C/WT21°C)</b>	Approx. 3.2 KG / 140 pcs FREEZE CYCLE TIME PER CYCLE 27 minutes	
<b>WATER CONSUMPTION PER 24H (AT32°C/WT21°C)</b>	0.27 m <sup>3</sup> ≈ 1.5 L / 1 KG ice	

NOTE:  
All dimensions indicated are  
Width x Depth x Height in mm  
\*60Hz units are available on request

### OPERATING CONDITIONS:

• Voltage Range: 198V-254V • Ambient Temperature: 1°-40°C • Water Supply:  
5°-35°C / 0.07-0.78 Mpa / 7.25-116 PSI • AC Supply Voltage: 1/220-240V / 50Hz