

Upright Cabinets

T-49F-HC

 Upright Foodservice Freezer, 2 Full Solid Swing Doors



Dimensions		Build		Technical	
External Width (mm)	1375	Door Description	2 Full Solid Swing Doors	Temperature Holding	-23°C
External Depth (mm)	750	Exterior Construction	Stainless steel front, aluminium sides & rear	Refrigerant	R290
External Height (mm)	2074	Interior Construction	Clear coated aluminium, stainless steel base	Voltage / Frequency / Phase	220-240V/50Hz/1
Exclusions	Depth does not include 13 mm for rear access panel.	Air Intake Position	Front	Amps	5.5
Net Volume (Litres)	914	Ventilation Position	Rear	Wattage	1265
Gross Volume (Litres)	1388	Clearance Required	26 mm rear, zero sides	Climate Class	4
Supplied Shelves	8	Cord Length (Meters)	2.74	Operating Statement	Regular Duty: This appliance is intended for use in ambient temperatures up to 30°C.
Shelf Size (L x D mm)	624 x 569	Internal Lighting	LED	Testing Standard	EN 16825
Internal Net Height (mm)	1300	Standard w/ Locks	standard	EEC	D
Unpackaged Weight (kg)	207			EEL	75
Packaged Weight (kg)	218			kWh/24hr	12.2
Packaged Dimensions (W x D x H mm)	1486 x 902 2134			kWh/Annum	4478
Supplied with	ø 64 mm castors (83 mm height)			Defrost Type	Auto



Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland

0800 783 2049

EMEA

+41 61 563 07 05

Australia

+61 2 9619 9999

TFIUK@truemfg.com


TrueCHCustomerService@truemfg.com

TrueRefAus@truemfg.com



T-49F-HC

 Upright Foodservice Freezer, 2 Full Solid Swing Doors

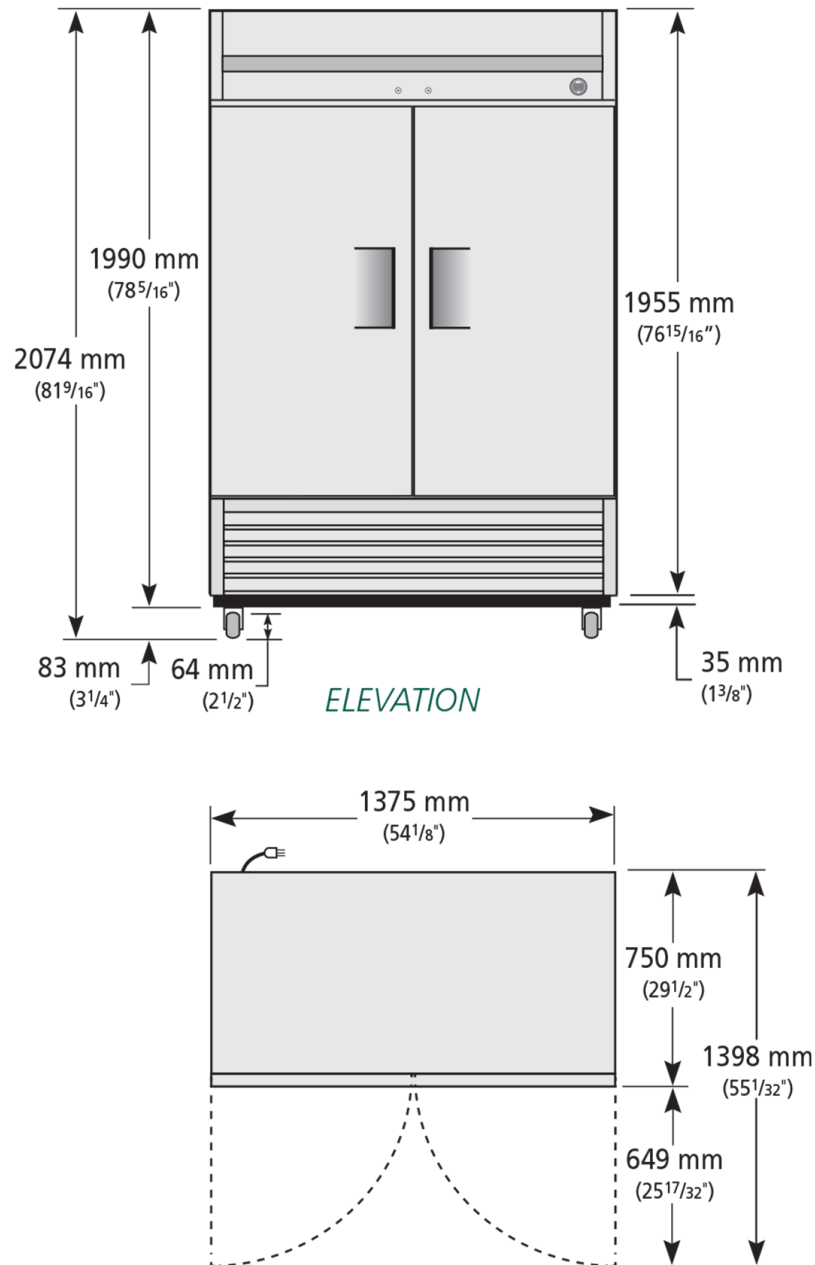

WARRANTY 5 YEARS
PARTS, COMPRESSOR AND LABOUR

Specifications subject to change without notice.
Chart dimensions rounded up to the next whole millimeter (inches rounded up to the 1/8")

UK & Ireland **0800 783 2049**
EMEA **+41 61 563 07 05**
Australia **+61 2 9619 9999**

TFIUK@truemfg.com
TrueCHCustomerService@truemfg.com
TrueRefAus@truemfg.com

